


## A SIMPLE SHAPE OFFERING A VARIETY OF ECO PATTERN OPTIONS




Eco-CityLock in Gray / Charcoal, Herringbone pattern

<b>2<sup>3</sup>/<sub>8</sub>"*</b>	<b>THICKNESS</b>
<b>4" x 8" *</b>	<b>DIMENSIONS</b>


\* English measurements are nominal. Exact dimensions are shown metrically as installed measurements.

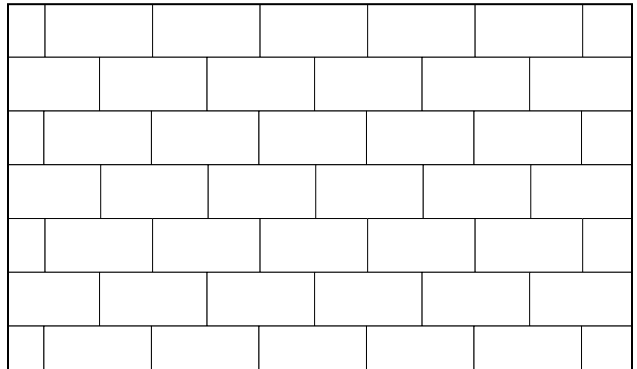

**Running Bond**

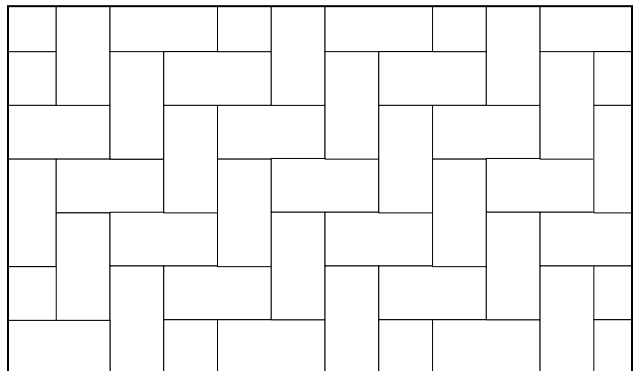

**Herringbone**

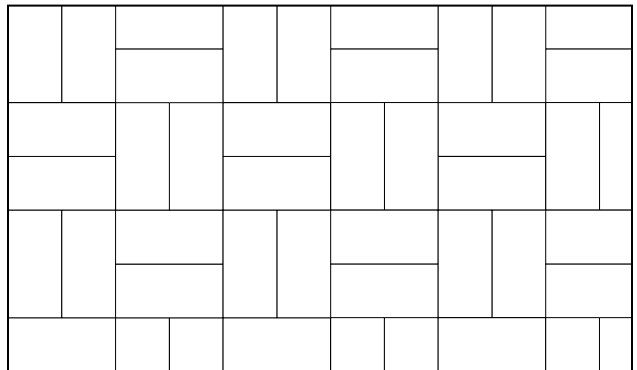

**Basket Weave**

### SPECS

- Chamfered edges. Blind spacer bars
- Initial infiltration rate exceeds 700 in/hour per ASTM C1781
- Meets ASTM specification C-936
- 4.65 pieces per square foot
- See product chart for English square footage and other information
- See product color run sheet for available colors