

BUILDING FACADE

ELASTOMERIC SEALANT

MINIMUM 12" (300MM) WIDE CONCRETE BAND  
WITH REBARS CONTINUOUS

CONCRETE PAVER  
2 3/8" (60MM) MINIMUM THICKNESS

GEOTEXTILE AS REQUIRED


CONCRETE CURB  
CONTROL JOINTS AS REQUIRED

BEDDING SAND  
APPROXIMATELY 1" TO 1 1/2" (25-40MM)

CONCRETE SLAB  
4" (100MM) MINIMUM THICKNESS  
WITH REBAR @ 12" (300MM) EACH WAY

COMPACTED SOIL SUBGRADE

PREMOULDED EXPANSION JOINT FILLER

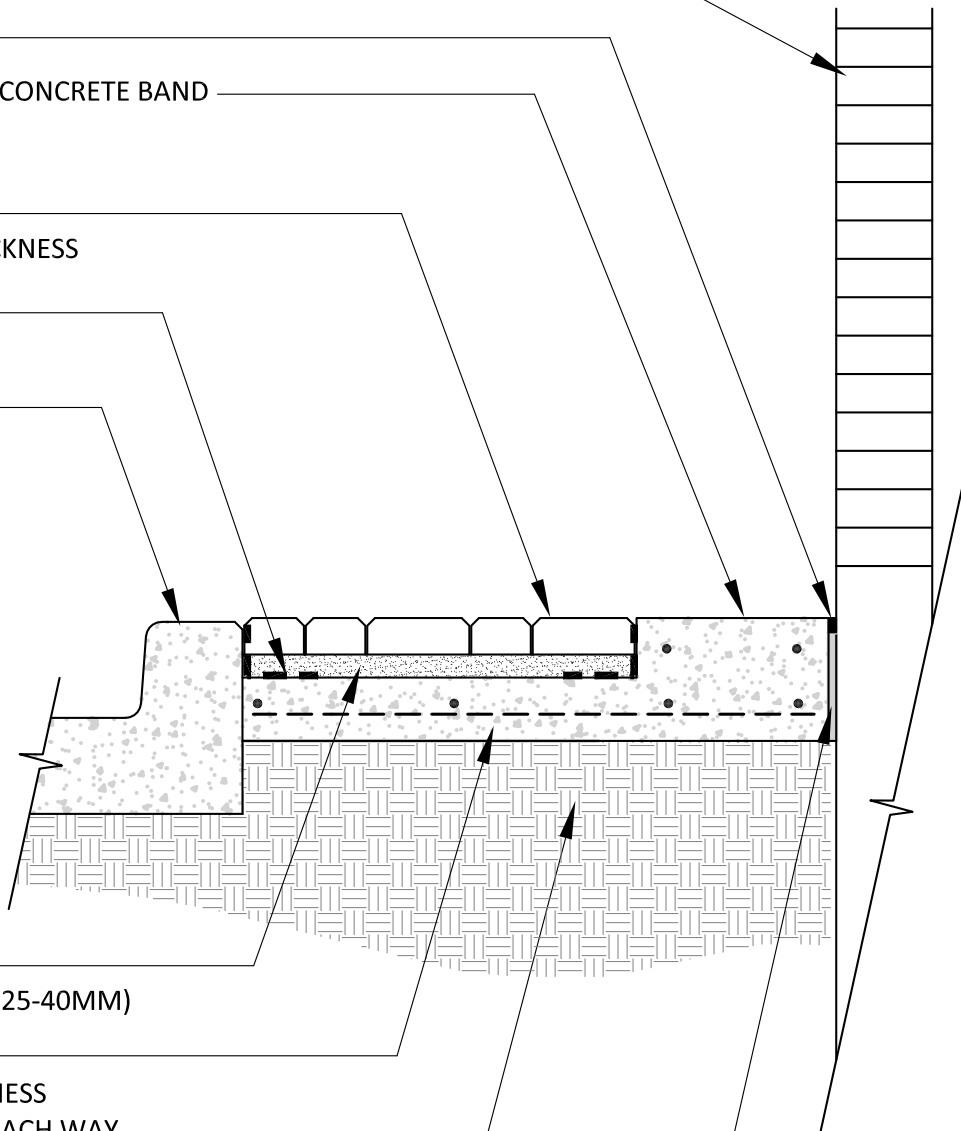

Copyright 2018 Keystone Retaining Wall Systems, LLC  
The suitability and/or manner of use of any details contained in this document is the sole responsibility of the user.  
Final project specific designs shall be prepared by a licensed professional Engineer or Architect.



4444 W 78th Street  
Minneapolis, MN 55435  
952-897-1040

Designed By:  
RKM

Checked By:

Scale:  
NO SCALE

Title:  
CONCRETE CONTINUITY BAND ADJACENT TO  
BUILDING FACADE W/CONCRETE BASE

Project:  
KEYSTONE HARDSCAPES CONCRETE PAVER

Date:  
03-2019

Revision:

Drawing No:  
1 of 1