

BUILDING FACADE

ELASTOMERIC SEALANT

MINIMUM 12" (300MM) WIDE CONCRETE BAND WITH REBARS CONTINUOUS

CONCRETE PAVER
2 3/8" (60MM) MINIMUM THICKNESS

GEOTEXTILE AS REQUIRED


CONCRETE CURB
CONTROL JOINTS AS REQUIRED

BEDDING SAND
APPROXIMATELY 1" TO 1 1/2" (25-40MM)

COMPACTED AGGREGATE BASE
4" (100MM) MINIMUM THICKNESS

COMPACTED SOIL SUBGRADE

PREMOULDED EXPANSION JOINT FILLER

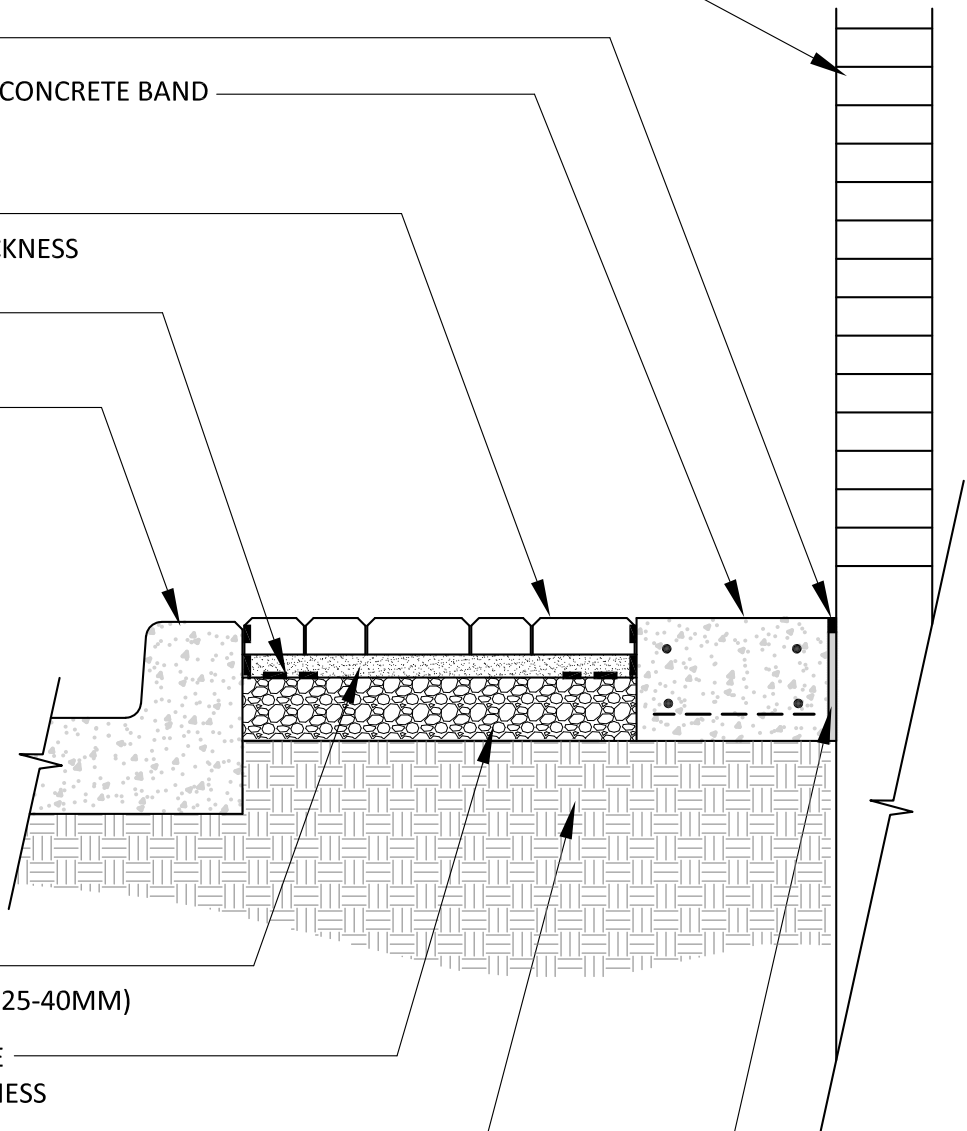

Copyright 2018 Keystone Retaining Wall Systems, LLC
The suitability and/or manner of use of any details contained in this document is the sole responsibility of the user.
Final project specific designs shall be prepared by a licensed professional Engineer or Architect.



4444 W 78th Street
Minneapolis, MN 55435
952-897-1040

Designed By:
RKM

Checked By:

Scale:
NO SCALE

Title:
CONCRETE CONTINUITY BAND ADJACENT TO BUILDING FACADE W/GRANULAR BASE

Project:
KEYSTONE HARDSCAPES CONCRETE PAVER

Date:
03-2019

Revision:

Drawing No:
1 of 1