


ADJACENT PAVING

PERMEABLE CONCRETE PAVER  
 3 1/8" (80MM) MINIMUM THICKNESS  
 300 IN/HR MINIMUM INFILTRATION RATE

FILL JOINTS WITH ASTM NO. 8 OR NO. 9

ADJACENT SIDEWALK

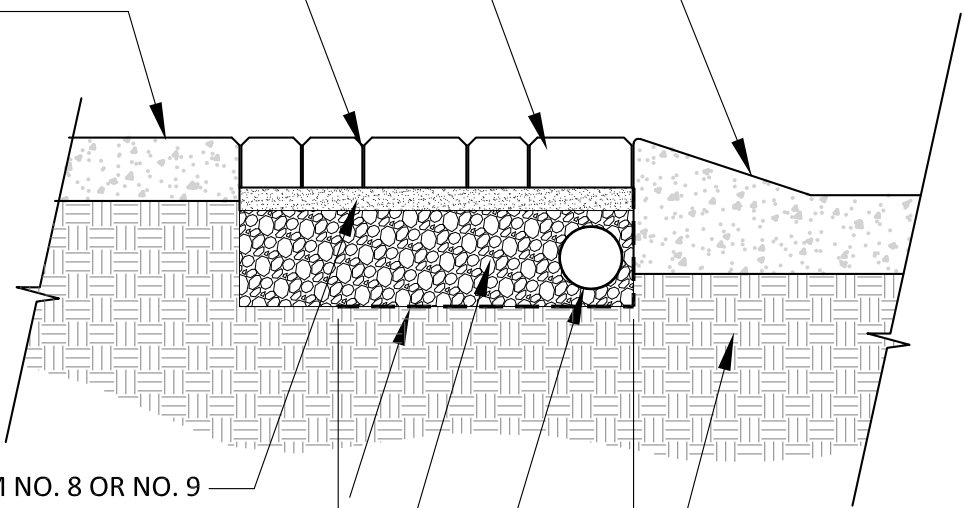

1 1/2" TO 2" (40-55MM) ASTM NO. 8 OR NO. 9

IMPERMEABLE LINER

GRANULAR BASE  
 6" (150MM) MINIMUM COMPACTED ASTM NO. 57

MINIMUM 3'-0"  
 (915MM)

OPTIONAL PERFORATED PIPE

COMPACTED SOIL SUBGRADE

Copyright 2018 Keystone Retaining Wall Systems, LLC  
 The suitability and/or manner of use of any details contained in this document is the sole responsibility of the user.  
 Final project specific designs shall be prepared by a licensed professional Engineer or Architect.



4444 W 78th Street  
 Minneapolis, MN 55435  
 952-897-1040

Designed By:  
 RKM

Checked By:

Scale:  
 NO SCALE

Title:

SIDEWALK / STREET  
 PERMEABLE PAVING DETAIL

Project:

KEYSTONE HARDSCAPES CONCRETE PAVER

Date:

03-2019

Revision:

Drawing No:

1 of 1