

ADJACENT PAVEMENT

MONOLITHIC CONCRETE HEADER
MINIMUM 12" (300MM) WIDTH

CONCRETE PAVER
2 3/8" (60MM) MINIMUM THICKNESS

BEDDING SAND
APPROXIMATELY 1" TO 1 1/2"
(25-40MM)


CONCRETE PAVEMENT

MIN. 12"
(300MM)

SUB-BASE

COMPACTED SOIL SUBGRADE

3" (75MM) O.D. PVC PIPE WITH PEA GRAVEL
COVER PIPE TOP & BOTTOM
OPENINGS WITH GEOTEXTILE

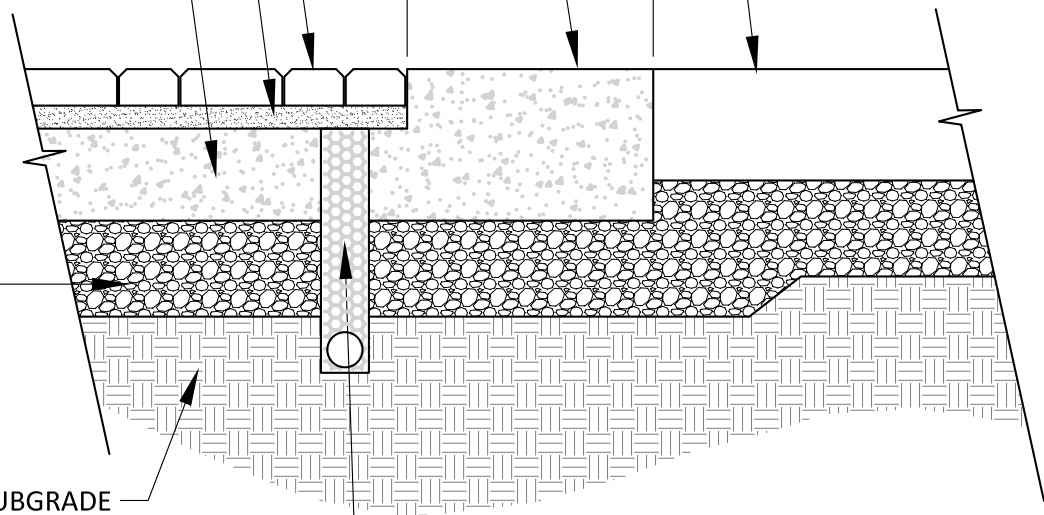

Copyright 2018 Keystone Retaining Wall Systems, LLC
The suitability and/or manner of use of any details contained in this document is the sole responsibility of the user.
Final project specific designs shall be prepared by a licensed professional Engineer or Architect.



4444 W 78th Street
Minneapolis, MN 55435
952-897-1040

Designed By:
RKM

Checked By:

Scale:
NO SCALE

Title: DRAINAGE WEEPS AT MONOLITHIC
CONCRETE HEADER ON
PC CONCRETE PAVEMENT

Project:
KEYSTONE HARDSCAPES CONCRETE PAVER

Date:
03-2019

Revision:

Drawing No:
1 of 1